


# Purefast® HomeXtreme

## Handout

### DEXSORB® for PFAS Removal

Cyclopure's DEXSORB granular adsorbent is a first-ever use of renewable cyclodextrins in water treatment. Sub-nanometer cyclodextrins are molecularly selective for the removal of per- and polyfluoroalkyl substances (PFAS) from drinking water. DEXSORB is certified under NSF 61 as safe for drinking water treatment.

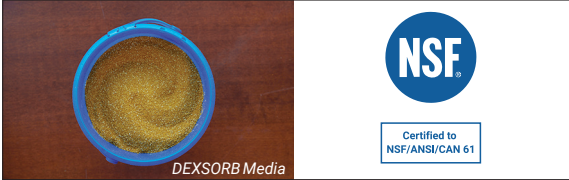

### Product Specifications

- Treatment Capacity<sup>1)</sup>: 160,000 gallons
- Operating Temperature: 40-120°F
- Pressure Drop Spec: < 5 psi @ 8 gpm
- Max Operating Pressure: 100 psi
- Size: 9" (Diameter) x 48" (Height)
- Rated Flow Rate: 8 gpm
- Peak Flow Rate: 12 gpm

### Pricing

- Contact us for a quote.
- Taxes and shipping not included.



<sup>1)</sup> Treatment capacity is based on the above Rated Flow Rates.  
<sup>2)</sup> Non-Detect means < 1 ng/L. (1 ng/L = 1 ppt)  
<sup>3)</sup> Defined by US EPA, Hazard Index = PFHxS in ppt /10 ppt + PFNA in ppt /10 ppt + GenX in ppt /10 ppt + PFBS in ppt /2000 ppt. And the Hazard Index should be < 1.0 to comply with the final drinking water PFAS limit by US EPA.

### Performance Data Sheet

Internal testing demonstrates full removal of 8 PFAS (i.e., PFOA, PFOS, PFHpA, PFHxS, PFNA, GenX, PFBS, and PFDA) at an influent concentration of 40 ppt per PFAS.

| Substance | Influent Challenge Concentration | Effluent Concentration   | US EPA Final Drinking Water Limit |
|-----------|----------------------------------|--------------------------|-----------------------------------|
| PFOA      | 40 ng/L                          | Non-Detect <sup>2)</sup> | < 4 ng/L                          |
| PFOS      | 40 ng/L                          | Non-Detect               | < 4 ng/L                          |
| PFHpA     | 40 ng/L                          | Non-Detect               | NA                                |
| PFHxS     | 40 ng/L                          | Non-Detect               | Hazard Index <sup>3)</sup> < 1.0  |
| PFNA      | 40 ng/L                          | Non-Detect               | Hazard Index < 1.0                |
| GenX      | 40 ng/L                          | Non-Detect               | Hazard Index < 1.0                |
| PFBS      | 40 ng/L                          | Non-Detect               | Hazard Index < 1.0                |
| PFDA      | 40 ng/L                          | Non-Detect               | NA                                |

### Demonstrated Performance

DEXSORB has been applied in residential filtration products and large-scale engineered treatment systems across the U.S. It has demonstrated superior effectiveness and capacity for PFAS removal in the treatment of drinking water, surface water and groundwater.

- Purefast Home products have been available for sale and installed in U.S. households to remove PFAS from drinking water since September 2023. Massachusetts DEP has been installing Purefast HomeXtreme filters to replace GAC filters in households since summer 2025.
- Case Study available on request for Purefast Home filter installed at a New Jersey residence in May 2023 to treat domestic well water. The single filter has operated for 3 years, treating over 160,000 gallons of water to non-detect.
- DEXSORB has been used to treat PFAS at municipal drinking water plants in pilot and full-scale systems in Alabama, Alaska, Arizona, Massachusetts, Maryland, Nevada, New Hampshire, New Jersey, North Carolina, and Pennsylvania. DEXSORB is certified for use to treat drinking water under NSF 61, and has been approved for drinking water treatment in the states of Massachusetts, New Jersey, and Pennsylvania.



Product Support Contact  
contact@cyclopure.com  
cyclopure.com



cyclopure



## Purefast® HomeXtreme

### Point-of-Entry Water System for PFAS Removal

High-capacity water filtration systems using DEXSORB® to remove PFAS to non-detect at a cost of less than one penny per gallon. The Purefast HomeXtreme filter connects to your residential water system and will require a plumber for installation.




Purefast® HomeXtreme

User Manual

Important Information

- Read this manual first and determine the location of Purefast® HomeXtreme before installation.
- Install the system on the main water supply after existing treatment systems (e.g., softener, UV disinfecter, pH neutralizer, GAC system, etc.) and upstream of all indoor faucets.
- We recommend installing (i) a bypass line to avoid water shutoff during filter replacement and (ii) union connections on either side of the vessel to facilitate filter replacement.
- The use of plumber’s tape will be needed on the threaded connections.
- Purefast® HomeXtreme system comes with two components: a capped FRP vessel pre-loaded with DEXSORB media and a separate vessel control head. Please DO NOT try to lift or move the vessel inner tube, as this can cause malfunction of the PoE system.

Installation Diagram

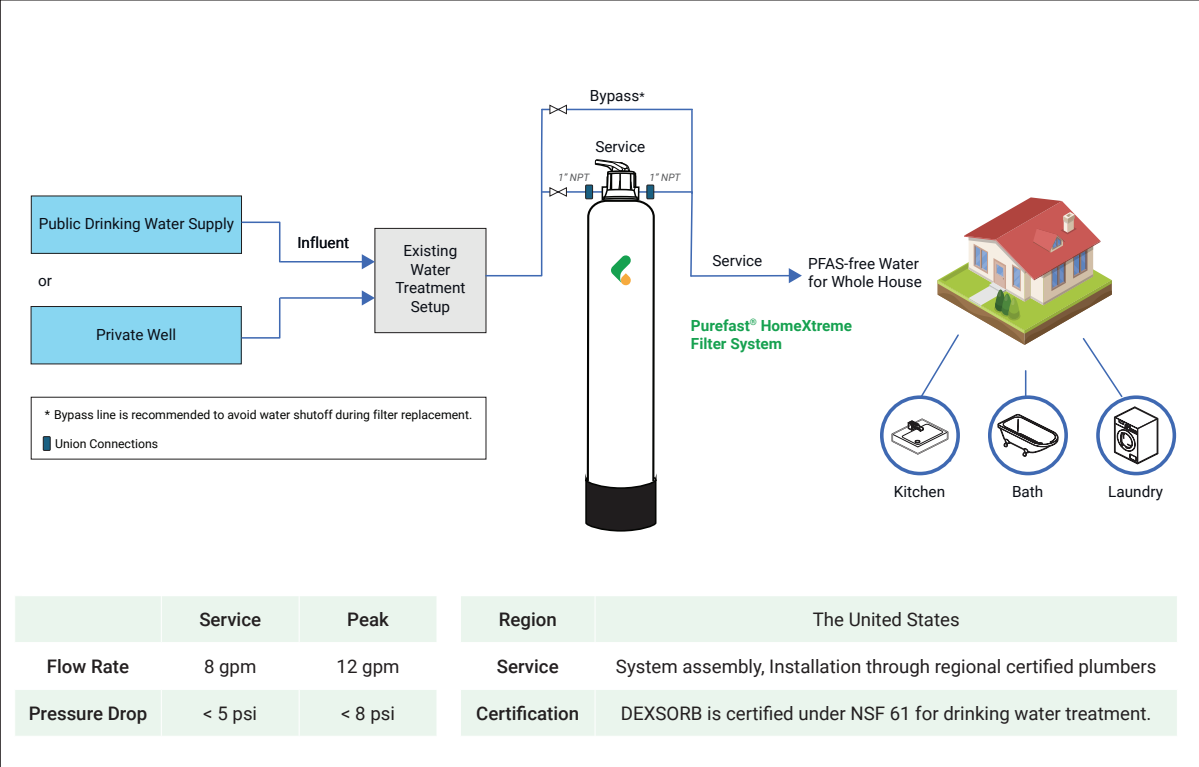

Purefast® Home connects to your residential water system and will require a plumber for installation. Please follow this manual for system installation and commissioning to ensure proper setup and operation.

Installation Instructions

Your Purefast® HomeXtreme system consists of a FRP vessel, pre-loaded with DEXSORB® media. Your Purefast® HomeXtreme Accessories Box contains a control head, one PFAS water test kit, and a ¾-inch garden hose adapter. The control head features three ports (1-inch FNPT), and a silver dial to switch between three operation modes (Backwash, Fast Rinse, and Filter). As shown in **Figure 1**:

- Port 1 is the inlet for all three modes.
- Port 2 is the outlet for discharge on the Backwash and Fast Rinse modes.
- Port 3 is the outlet for daily service on the Filter mode.
- For system commissioning and operation, Ports 1, 2, and 3 should be used for the Backwash, Fast Rinse, and Filter modes according to the following instructions:

1. Preparation

- (1) Remove the packaging from the filter system.
- (2) Remove the cap from the vessel and carefully screw the control head onto the vessel tightly. Confirm that the conical distributor (see **Figure 1**) is attached to the control head before placing it on the vessel. The conical distributor should insert directly onto the vessel inner tube.
- (3) Turn off the flow of the main water supply line.
- (4) Place your assembled system at the desired location.
- (5) Plumb the system into the main water supply line through Port 1 (Filter inlet) and Port 3 (Filter outlet). All ports are 1” FNPT connection. **Important:** plumb in union connections on either side of the system *plus* a bypass line as shown in the Installation Diagram.
- (6) Set up **temporary** plumbing or a garden hose from Port 2 (Discharge outlet) to a house drain. You may use the ¾-inch garden hose adapter provided.

2. Backwash

Commissioning backwash is required to condition the system before operation.

- (1) Turn the dial to point the arrow to ‘Backwash Mode’, as pictured in **Figure 2**.
- (2) Start pumping water through Port 1 at a low flow rate of 0.8 gpm to fill up the vessel. When the vessel is full, water will start flowing out of Port 2. The discharge from Port 2 will have a gray/black and yellow, cloudy water discharge during the backwash. Continue backwashing for approximately 30 minutes.
- (3) Turn off the flow to Port 1.

3. Fast Rinse

After backwashing:

- (1) Turn the dial to point the arrow to ‘Fast Rinse Mode’, as shown in **Figure 3**.
- (2) Start pumping water through Port 1 at full operation pressure and rinse the system for 15 minutes.
- (3) Turn off flow to the system.

4. Filter

Filter mode is the standard mode for system operation. After backwashing and fast rinsing:

- (1) Turn the dial to ‘Filter Mode’, as shown in **Figure 4**.
- (2) Resume flow to the system to begin operation.
- (3) Enjoy the PFAS-free water from all indoor faucets.

Figure 1. Purefast® HomeXtreme Control Head featuring Ports 1, 2 and 3, dial, and conical distributor.

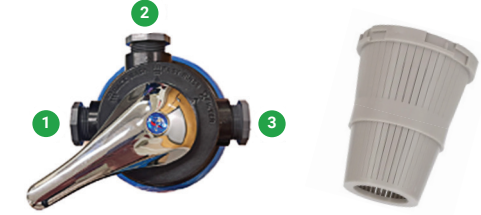


Figure 2. Purefast® HomeXtreme Control Head in **Backwash** mode.

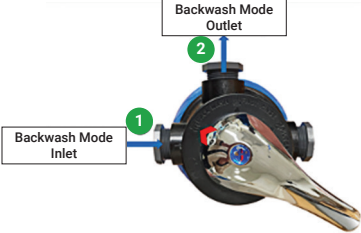


Figure 3. Purefast® HomeXtreme Control Head in **Fast Rinse** mode.


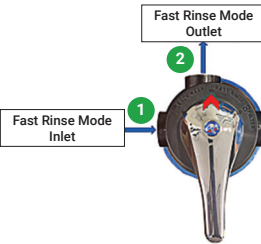


Figure 4. Purefast® HomeXtreme Control Head in **Filter** mode.

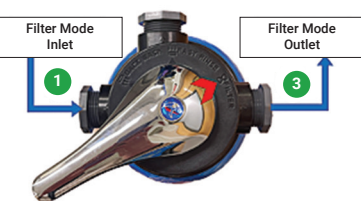

Replacements

- After 24 months<sup>4)</sup>, you will receive a reminder to replace the PFH Xtreme filter and return the used filter vessel back to Cyclopure’s Evanston, IL facility.

Filter Exchange Program

- Sustainability is a priority at Cyclopure. Our Purefast Home Water Treatment System will do the work to achieve ZERO PFAS at every tap in your home. If you return your used filter vessel to the company, we will ensure that ZERO PFAS waste is returned to the environment.
- We use Cyclopure’s proprietary PFAS desorption and media regeneration method to separate PFAS from used DEXSORB media at ambient conditions. The separated PFAS waste will then be fully destroyed. Regenerated DEXSORB will be reconditioned for reuse!
- When you are ready to replace your current filter, contact us to place a new order. When you receive the new filter, save the shipping box to return the used filter to our Evanston, IL facility. **Shipping is prepaid.**

Warranties

Performance claims are based on internal test data. Actual performance is dependent on influent water quality, flow rates, system design and application. Results may vary. Cyclopure makes no warranties of any kind, expressed or implied, statutory or otherwise, and expressly disclaims all warranties of every kind, concerning its Purefast Home filters, including, without limitation, warranties of merchantability and fitness for a particular purpose, except (i) that the filter should be capable of performing as described in the Performance Data Sheet, and (ii) the filter will be free of defects in materials and workmanship, when used in compliance with installation and operating guidelines, for a period of 24 months<sup>4)</sup> from the date of purchase. The company’s obligation shall be limited solely to the refund of the purchase price or replacement of the product proven defective, in Cyclopure’s sole discretion. Determination of suitability of this product for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. Use of this product constitutes Buyer’s acceptance of this Limited Liability.

<sup>4)</sup> 24-months capacity is dependent on water usage.

Purefast® HomeXtreme 0-100-0 System

0 There are **0 PFAS** in your water.

100 We **reuse 100% of the vessel media** in non-drinking water applications.

0 **0 PFAS waste after use** as PFAS are separated and concentrated from media for full destruction to prevent recontamination.

